



To connect the Cable Modem to your computer, perform the following steps:

1. Plug the Ethernet cable into the NIC by inserting one end of the Ethernet cable into the card's Ethernet port.

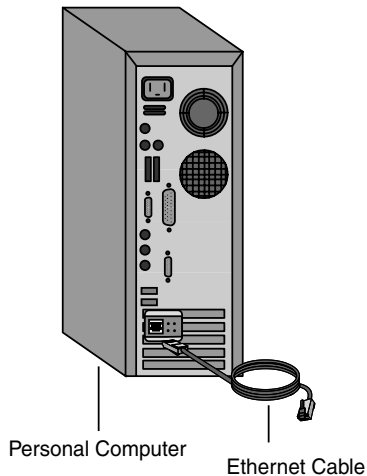

2. Insert the other end of the cable into the Ethernet port on the back of the cable modem.

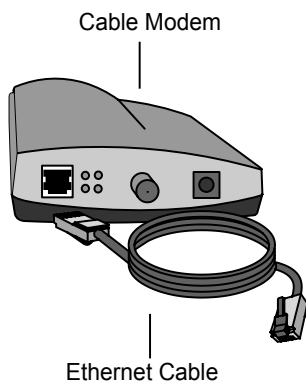


After installing the USB adapter, you will need to install the necessary drivers. For most operating systems, the system will automatically detect the new hardware. Refer to the manufacturer's floppy diskette or CD for the network adapter that you installed to obtain and install the driver software. The network adapter won't work unless the correct driver software is installed.

Cable Modem Installation

The final step to complete the hardware installation is to connect the cable modem. To do this, perform the following steps:

1. Connect one end of the coaxial cable jumper to the cable outlet wall plate
2. Connect the other end to the modem.

3. If your television is connected to this same outlet, you will need to install a two-way splitter. Refer to the diagram below:

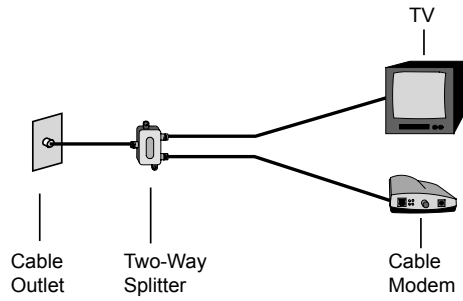

4. Once the cable is connected, plug in your modem. Refer to the Owner's Manual that accompanies the Modem in your kit for details on your modem.

CONGRATULATIONS! You have completed the hardware installation. Now, insert the Comcast High-Speed Internet Install Wizard to complete the installation process.